

# 6'X3' Raised Garden Bed Assembly Manual


Thank you for purchasing a 6' x 3' Raised Garden Bed. Please take the time to identify all the parts prior to assembly.

Please use Safety Eyewear and Gloves while Assembling. Be sure to read and follow all operating instructions for any tools used during assembly.

Remember- NO SAW CUTTING IS REQUIRED!

Safety Points and Other Considerations
Please follow this instruction manual when assembling your Raised Garden Bed and retain the manual for future maintenance purposes.





#### Raised Garden Bed Dimensions:

A: Height = 33 1/2"

B: Outside Width = 72"

C: Outside Depth = 39"

D: Inside Width = 69"


E: Inside Depth = 36"


F: Height to Bottom of Screen = 21 1/2"

Estimated Assembly Time for the Raised Garden Bed = 1 Hour.

In the event of a missing or broken piece, simply call the Outdoor Living Today Customer Support Line @ 1-888-658-1658 within 30 days of the delivery of your purchase. It is our commitment to you to courier replacement parts, free of charge, within 10 business days of this notification. Replacement parts will not be provided free of charge after the 30 day grace period.

### Exploded View and Parts List for 6'x3' Raised Garden Bed

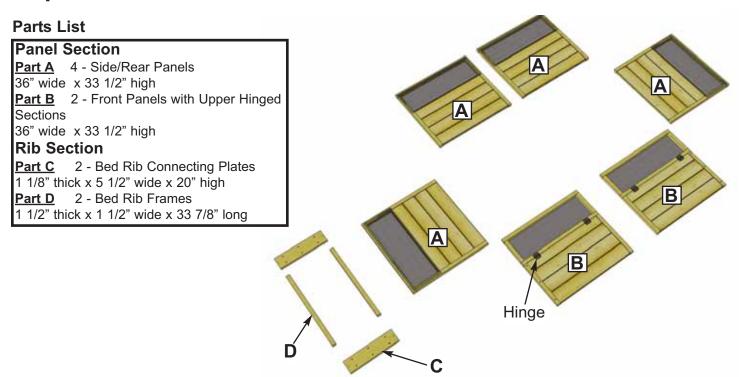

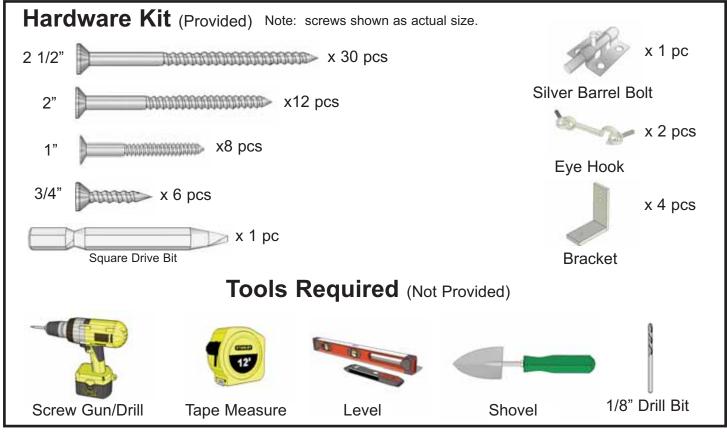



## Important Information for Homeowner


#### Selecting a Location - Garden Setting or Patio

Walk around your property and make notes of the following:

- sunny spots
- slope of the land
- light blocking trees and high buildings.

Don't hide your Raised Bed away in a dark corner.

Ensure it has easy access to it.



Having a water supply at hand avoids carrying heavy watering cans from the tap to the plant.

#### **Preparing the Ground for a Garden Setting**

Dig ground beneath the raised bed prior to assembly. Your new Raised Garden Bed will be open on the bottom which enables plant roots to access soil nutrients below ground level.

Add amendments to improve the subsoil. Once the ground plot has been dug and cleared of rocks, add peat moss and lime to balance the subsoil.

Lay down a sand perimeter base for the Raised Bed to sit on.

Lay down a 74" x 39" perimeter base 6" wide and 2" deep of sand for the Raised Bed Panels to sit on. The sand will provide good water drainage and prevent the Western Red Cedar wood from rotting prematurely.

#### **Patio Setting**

The Raised Bed can also be located on almost any flat surface - sand, pebbles/gravel, concrete or asphalt. Preparing the soil and the sand base beneath the Raised Bed will not be necessary. Consider lining the Raised Bed with landscape fabric to prevent soil from seeping out. Twenty inches of soil should be plenty for most types of vegetables and flowers. Please check growing instructions for root depths prior to planting.


#### Once the Raised Bed is Assembled - Add Soil


You will need approximate **1 cubic yard of quality soil.** (2/3 Topsoil to 1/3 Compost works well). Mix thoroughly. Fill the Raised Bed to within a few inches of the top of the wood framing (the start of the metal screening).


Add soil within two weeks of planting. Fertilizer may be required. Check with your local garden growing expert before adding any fertilizer!


#### **Arranging and Planting Crops**

Since requirements vary from region to region on how to arrange and plant crops, we recommend researching thoroughly before planting.



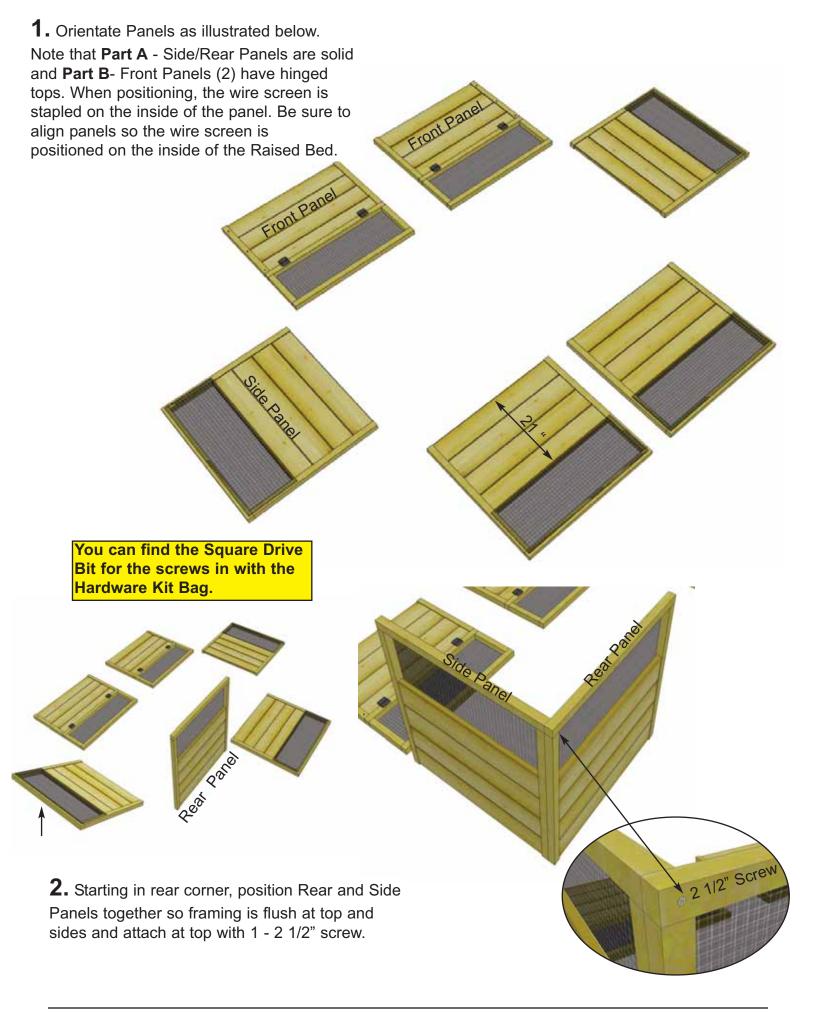

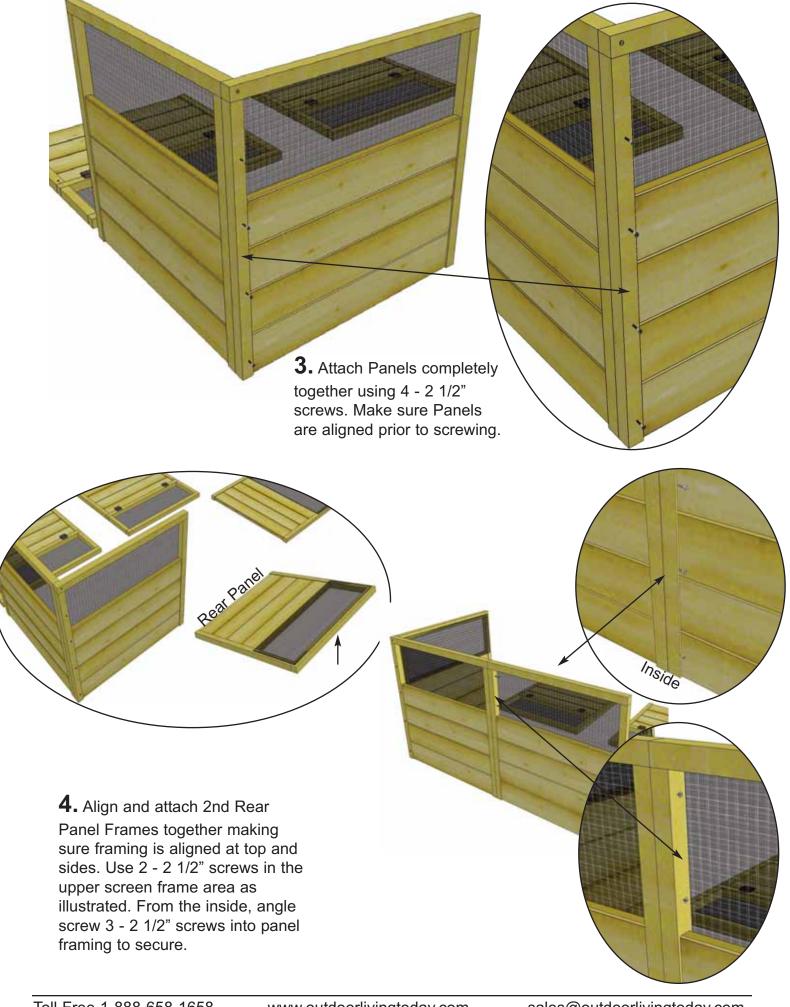

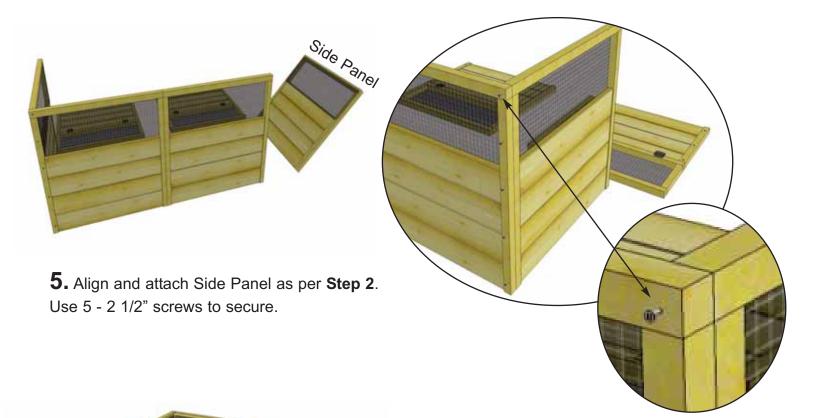





**6.** Align and attach Front Panel - **Part B** to Side Panel with 3 - 2 1/2". Align panel framing together as **Step 2**. Screw only into Front Panel framing below the screen hinged top.


Attach Eyehook Hardware in the Front and Side Panels top framing. Pre-drill shallow 1/8" hole to make it easier to screw Eyehook in.

Do a dry run prior to drilling holes to confirm fit.

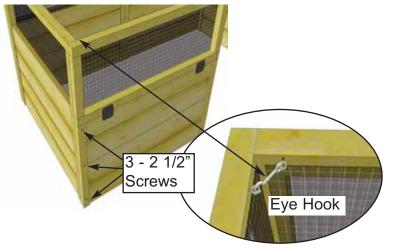

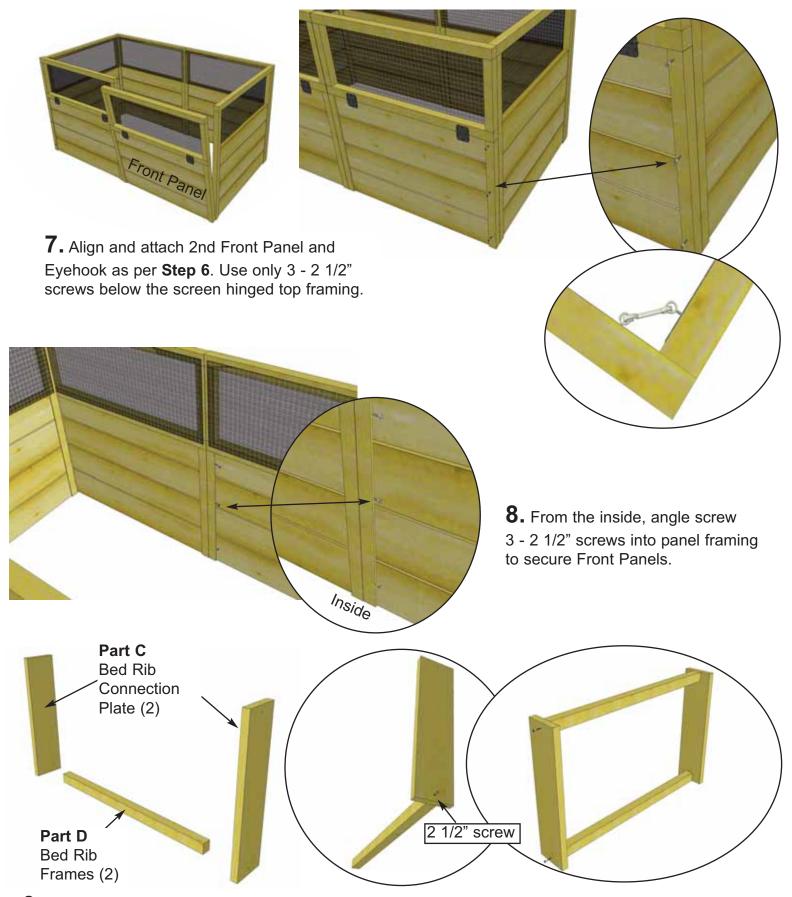


**9.** Locate Bed Rib Connection Plates (2) - **Part C** and both Bed Rib Frames (2) - **Part D**. On a level flat surface, screw Connection Plate and Frame together with 1 - 2 1/2" screw. Align so Plate and frame are flush at bottom. Complete both sides. Attach 2 Bed Rib Frames as illustrated above.

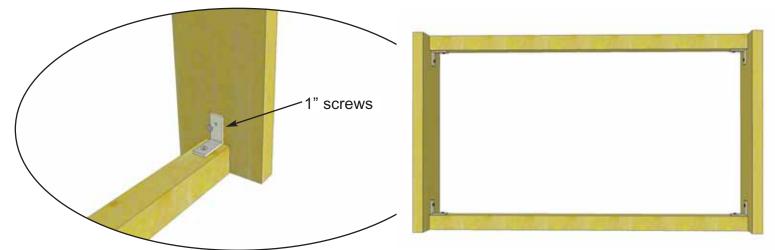



**10.** Locate Brackets (4). Position Brackets in each corner and secure with 2 - 1" screw per Bracket.



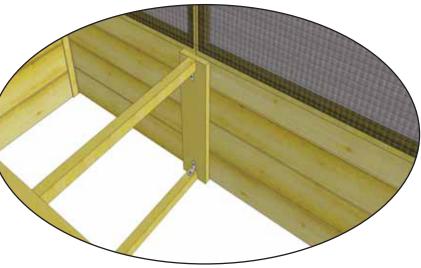

**11.** Lift and position completed Bed Rib between Front and Rear Panels at the mid point. Align with bottom of panels and centered on framing. Secure with 6 - 2" screws per plate. **Important-** be sure to screw into panel framing.

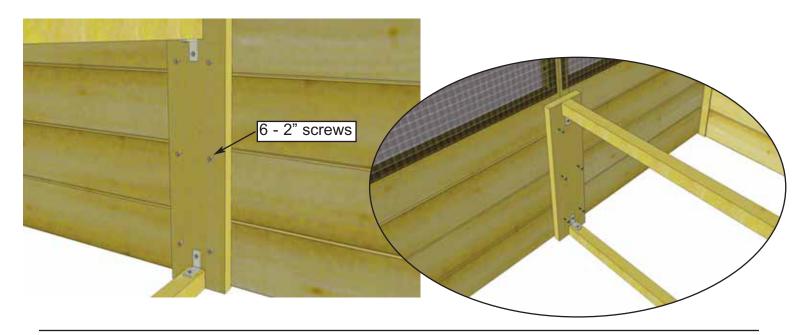

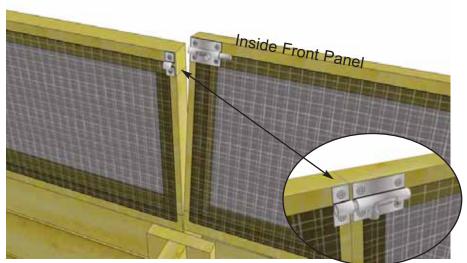

**12.** Attach Barrel Bolt to Inside of Front Panel framing. Pre-drill shallow 1/8" holes to prevent wood from splitting. Do a dry run first to confirm screw alignment before completely securing.





**13.** To access your Raised Garden Bed, open the Barrel Bolt and Eyehook in corner(s) to release the screened hinged panel. Be sure to close when your finished to keep dogs and pesky critters out!

We hope your experience constructing our **6'x3' Raised Garden Bed** has been both positive and rewarding. We value your feedback and would like to hear back from you on how well we are doing in the following areas:

- 1. Customer Service
- 2. On Time Shipping
- 3. Motor Freight Delivery
- 4. Quality of Materials
- 5. Assembly Manual
- 6. Overall Satisfaction.





Please call, write or email us at:

Canadian Address 9393 287th Street Maple Ridge, British Columbia Canada V2W 1L1 United States Address P.O. Box 96 Sumas, Washington USA 98295 The materials contained in this Assembly Manual may be downloaded or copied provided that ALL copies retain the copyright and any other proprietary notices contained on the materials. No material may be modified, edited or taken out of context such that its use creates a false or misleading statement or impression as to the positions, statements or actions.

Toll Line: 1.888.658.1658 | Fax: 1.604.462.5333 | sales@outdoorlivingtoday.com